
BUILT-IN REFRIGERATOR COLUMNS
BUILT-IN FREEZER COLUMNS
BUILT-IN WINE COLUMNS

DESIGN GUIDE



BUILT-IN COLUMNS

These premium refrigerators, freezers and wine columns are masterpieces of design and technology. Their stylish appearance reflects close attention to detail and high-quality materials, inside and out. The stainless steel front and panel ready doors are mounted with state-of-the-art engineered lift-and-swing hinges that give the perception of a weightless range of motion. Versatile installation options make it possible to bring together elegant configurations of the refrigerator, freezer and wine columns in any desired width. All three columns work in harmony with handles and finishes available for every Series.

INDEX




INTRODUCTION	3	BUILT-IN WINE COLUMNS	44
BUILT-IN REFRIGERATOR COLUMNS	4	60cm (24") Wine Column Panel Installed	46
90cm (36") Refrigerator Column Panel Installed	6	60cm (24") Wine Column Panel Ready	49
90cm (36") Refrigerator Column Panel Ready	9	45cm (18") Wine Column Panel Installed	52
75cm (30") Refrigerator Column Panel Installed	12	45cm (18") Wine Column Panel Ready	55
75cm (30") Refrigerator Column Panel Ready	15	MULTIPLE INSTALLATIONS	58
60cm (24") Refrigerator Column Panel Installed	18	105cm (42") Double Configurations	61
60cm (24") Refrigerator Column Panel Ready	21	120cm (48") Double Configurations	62
BUILT-IN FREEZER COLUMNS	24	135cm (54") Double Configurations	63
75cm (30") Freezer Column Panel Installed	26	150cm (60") Double Configurations	64
75cm (30") Freezer Column Panel Ready	29	150cm (60") Triple Configurations	65
60cm (24") Freezer Column Panel Installed	32	165cm (66") Triple Configurations	66
60cm (24") Freezer Column Panel Ready	35	180cm (72") Triple Configurations	67
45cm (18") Freezer Column Panel Installed	38	225cm (90") Triple Configurations	68
45cm (18") Freezer Column Panel Ready	41	Custom Door Panel	69
		Recommended Installations	70
		Refrigeration Handles	71
		Toekick Panel	72

BUILT-IN REFRIGERATOR COLUMNS



90cm - 75cm - 60cm
(36" - 30" - 24")
Panel Ready and
Panel Installed





90cm (36") Refrigerator Column Panel Installed

Dimensions



LRD905UBLXTT (left hinge)
LRD905UBRXTT (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

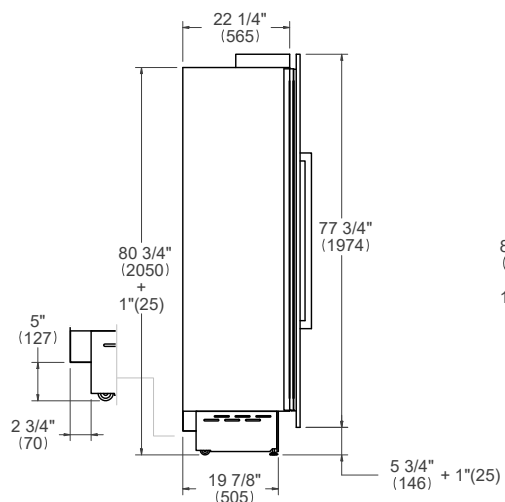


FRONT VIEW

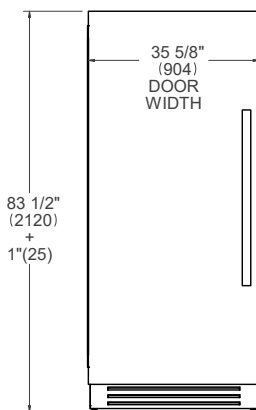


TOP VIEW

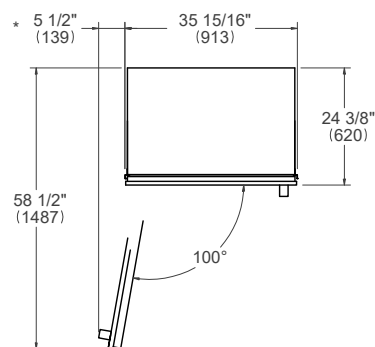


SIDE VIEW

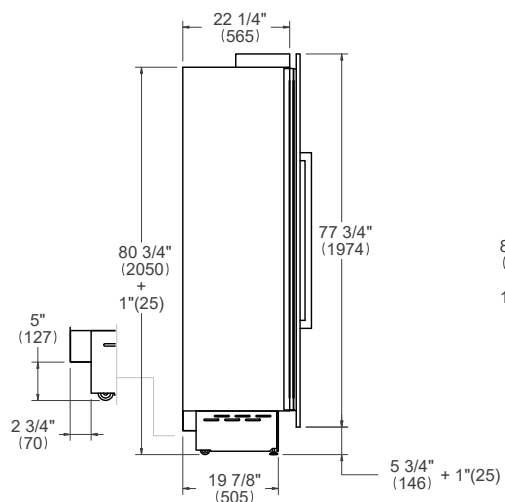

FRONT VIEW

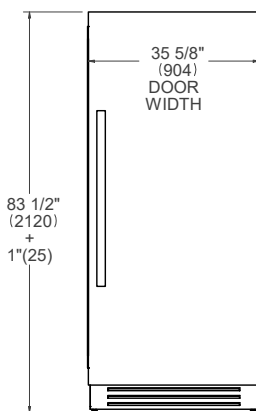

TOP VIEW

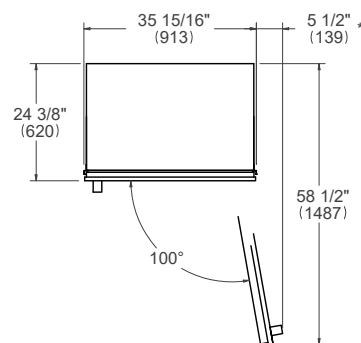

* Maximum Overall Handle Dimension

For detailed handle dimensions see page 71

90cm (36") Refrigerator Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	695 kg (1532 lb)
-------------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 220 W 1,2 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

90cm (36") Refrigerator Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

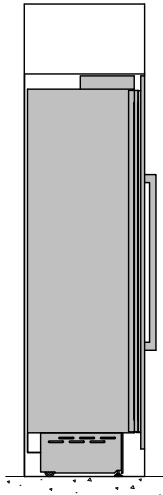

FRONT VIEW

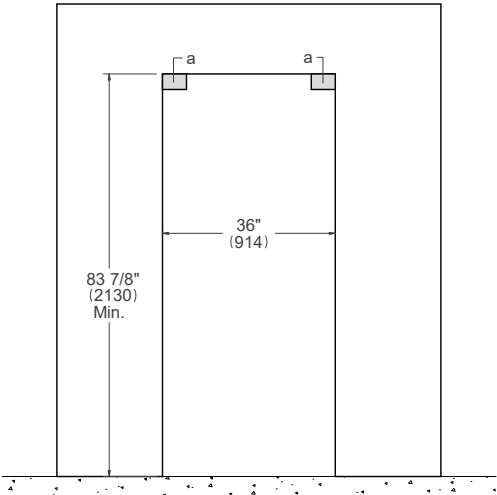

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


90cm (36") Refrigerator Column Panel Ready

Dimensions




LRD905UBLPTT (left hinge)
LRD905UBRPTT (right hinge)


SIDE VIEW

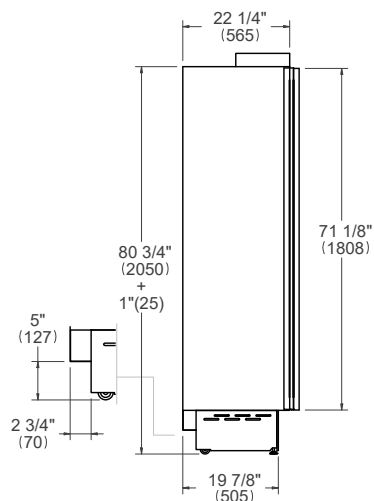


FRONT VIEW

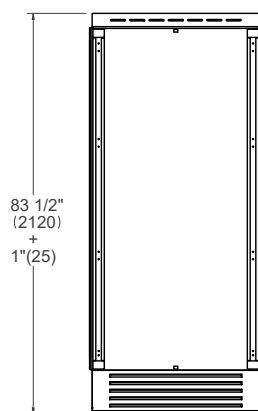


TOP VIEW

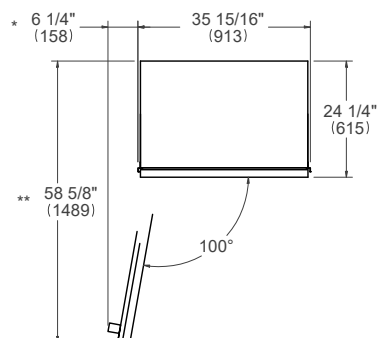


SIDE VIEW

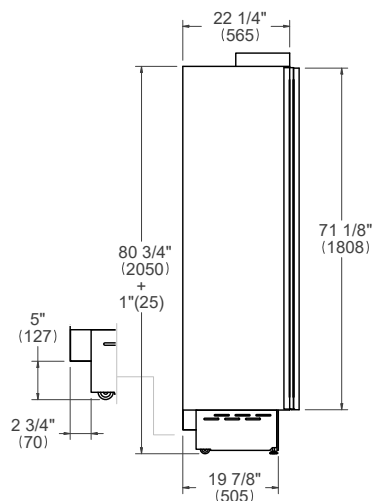

FRONT VIEW

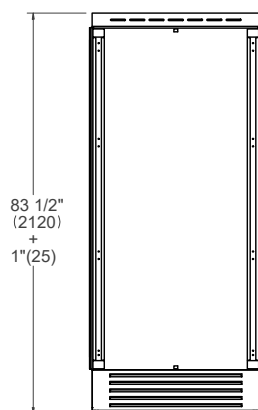

TOP VIEW

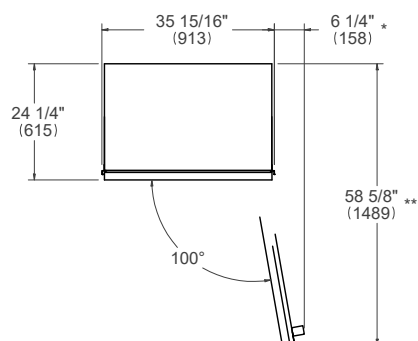

* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

90cm (36") Refrigerator Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product. For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	695 kg (1532 lb)
-------------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 220 W 1,2 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

90cm (36") Refrigerator Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

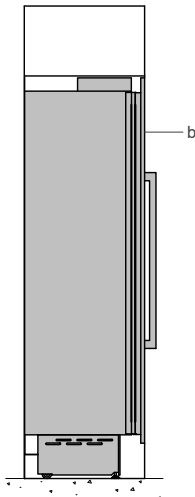

FRONT VIEW

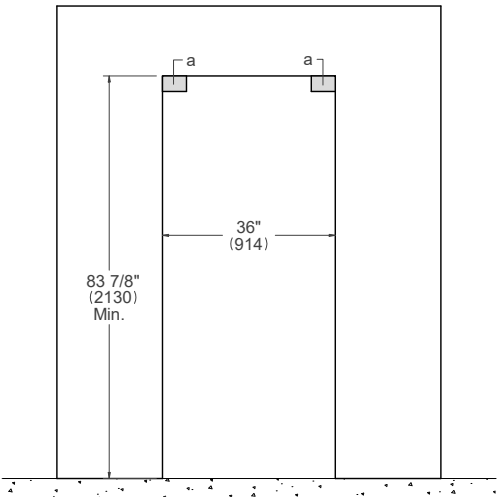

* Maximum Overall Handle Dimension
** Width of 19mm (3/4") Door Panel
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Refrigerator Column Panel Installed

Dimensions



LRD755UBLXTT (left hinge)
LRD755UBRXTT (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

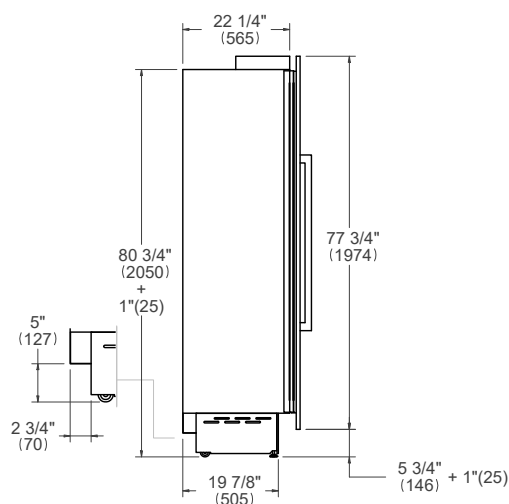


FRONT VIEW

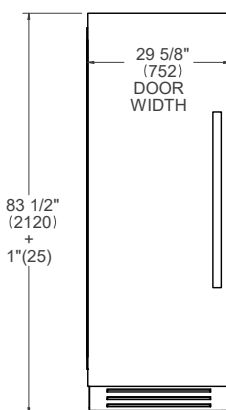


TOP VIEW




SIDE VIEW

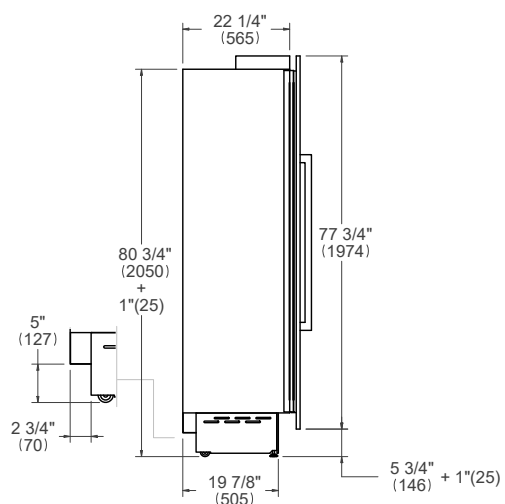

FRONT VIEW

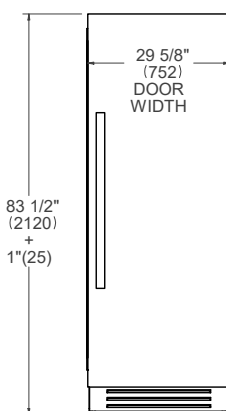

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Refrigerator Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)
-------------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 220 W 1,2 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Refrigerator Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

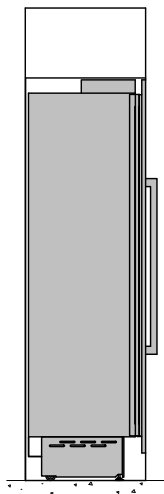

FRONT VIEW

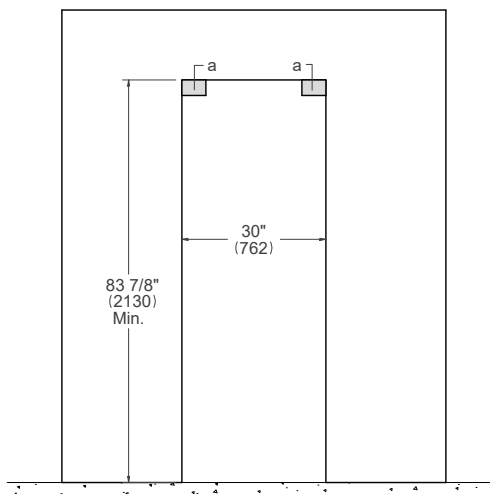

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.


75cm (30") Refrigerator Column Panel Ready

Dimensions



LRD755UBLPTT (left hinge)
LRD755UBRPTT (right hinge)


SIDE VIEW

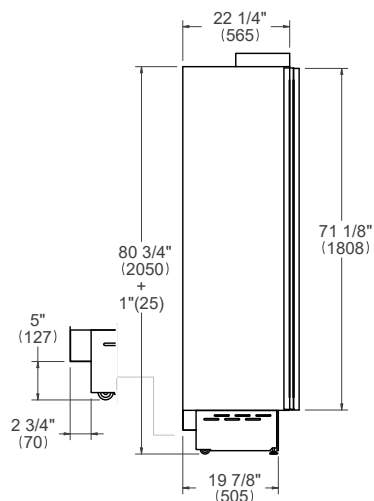


FRONT VIEW



TOP VIEW

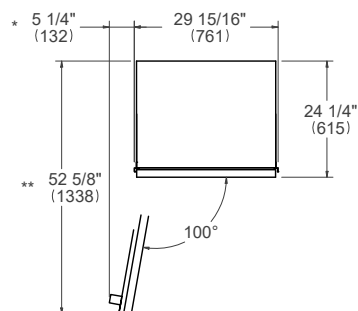


SIDE VIEW

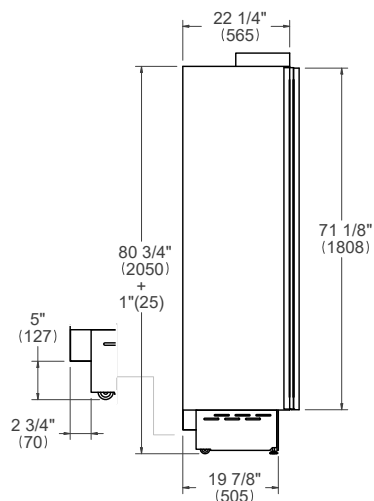

FRONT VIEW



TOP VIEW

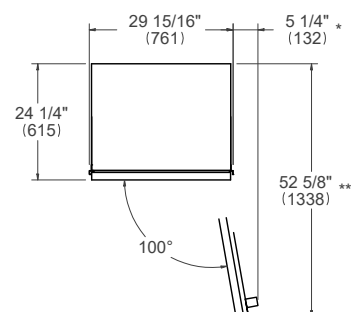

* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Refrigerator Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)
------------------------	------------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 220 W 1,2 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Refrigerator Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

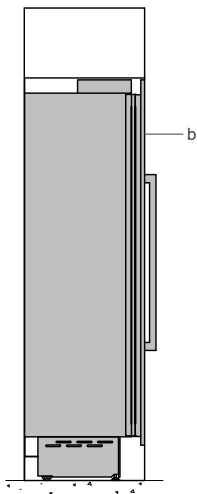

FRONT VIEW

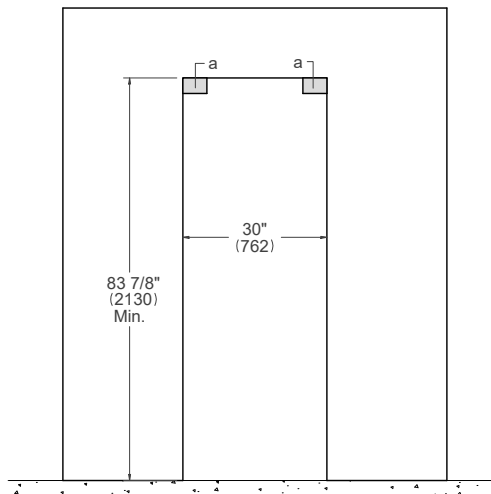

- (a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")
- (b) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

60cm (24") Refrigerator Column Panel Installed

Dimensions



LRD605UBLXTT (left hinge)
LRD605UBRXTT (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

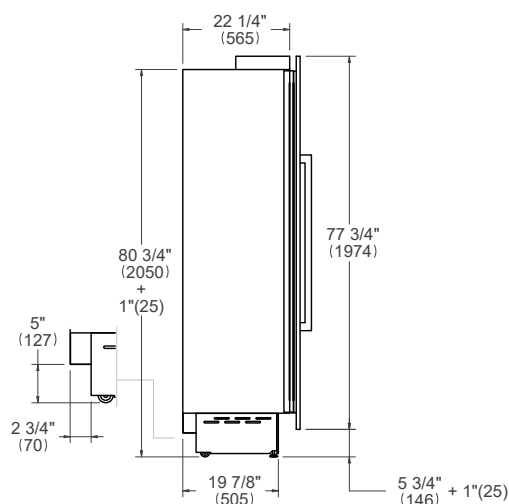


FRONT VIEW

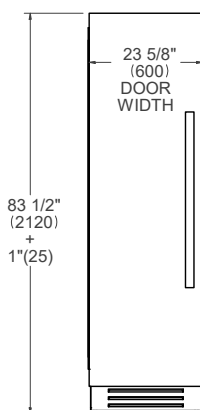


TOP VIEW




SIDE VIEW

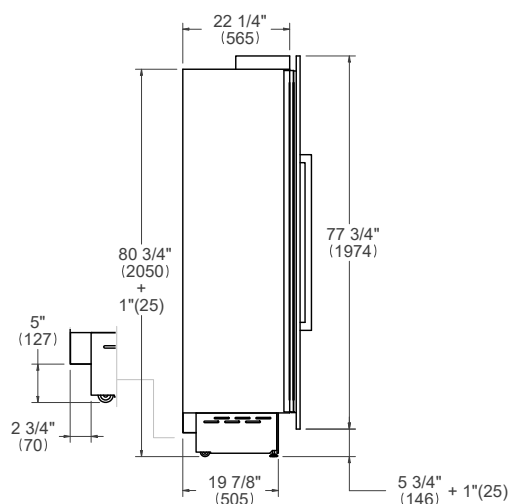

FRONT VIEW

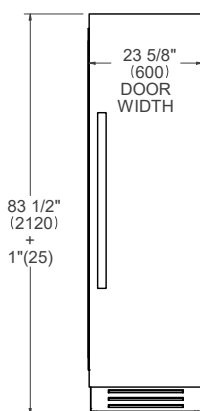

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Refrigerator Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)
-------------------------------	-----------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Refrigerator Column Panel Installed


Flush installation




TOP VIEW^b

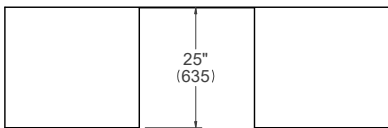

SIDE VIEW

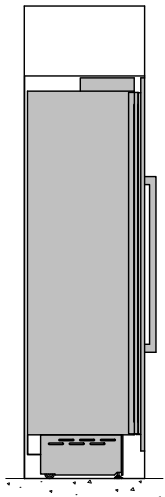

FRONT VIEW

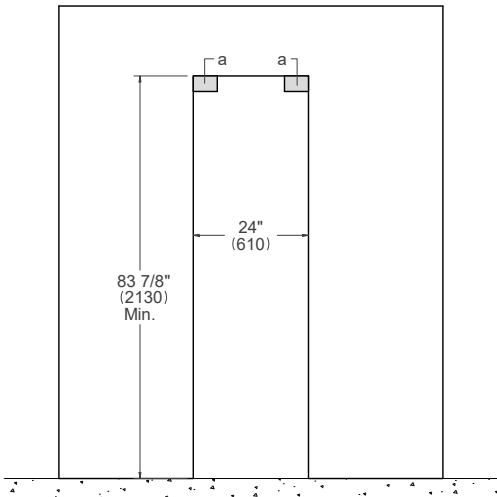

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


60cm (24") Refrigerator Column Panel Ready

Dimensions




LRD605UBLPTT (left hinge)
LRD605UBRPTT (right hinge)


SIDE VIEW

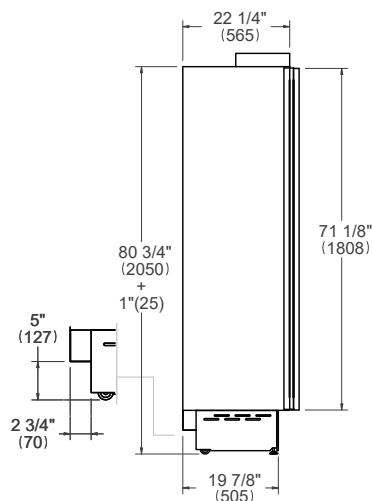


FRONT VIEW

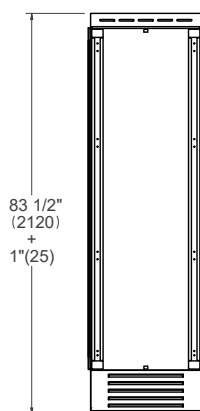


TOP VIEW




SIDE VIEW

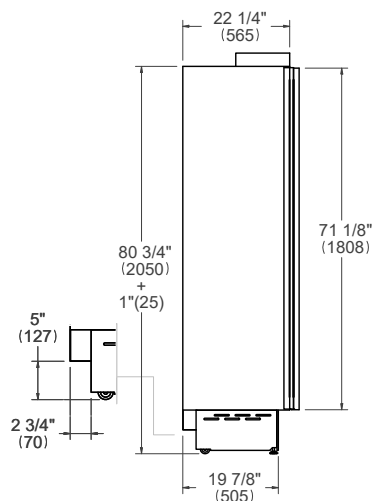

FRONT VIEW

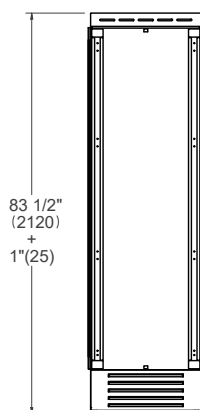

TOP VIEW



* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Refrigerator Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)
------------------------	-----------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Refrigerator Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

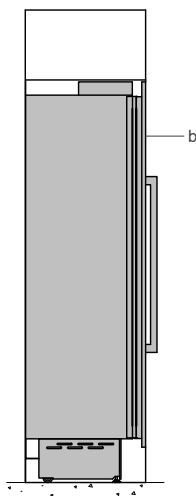

FRONT VIEW

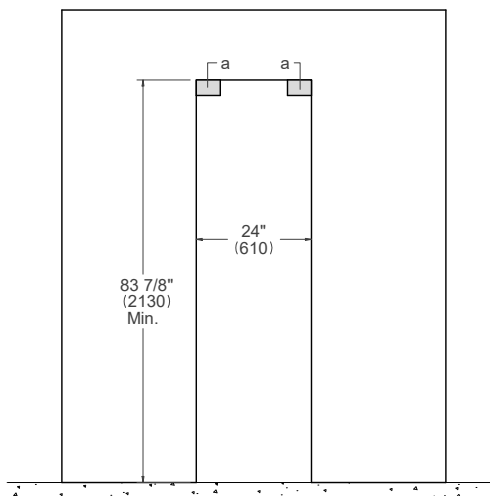

- (a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")
- (b) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

BUILT-IN FREEZER COLUMNS



75cm - 60cm - 45cm
(30" - 24" - 18")
Panel Ready and
Panel Installed





75cm (30") Freezer Column Panel Installed

Dimensions



FRZ755UBLXTT (left hinge)

FRZ755UBRXTT (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

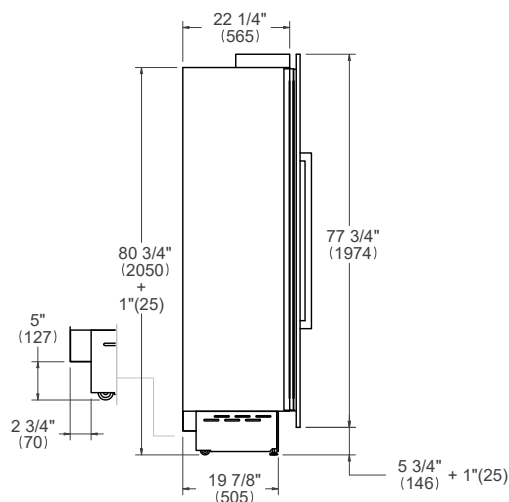


FRONT VIEW

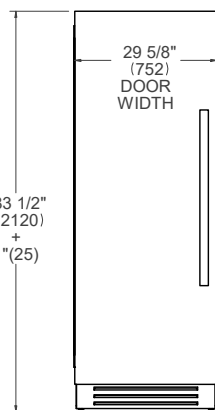


TOP VIEW




SIDE VIEW

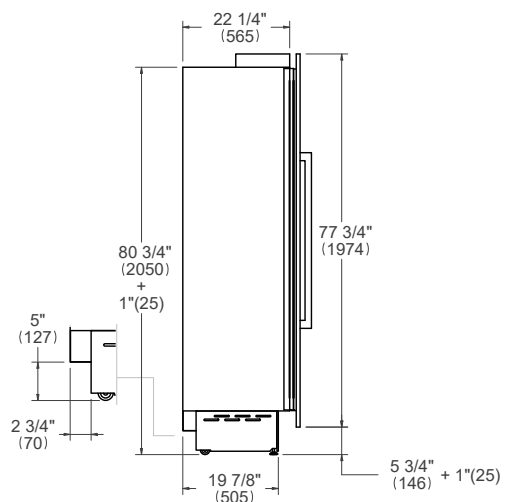

FRONT VIEW

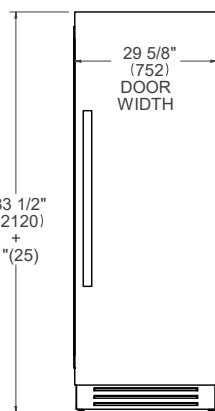

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Freezer Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)
-------------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 6,4mm (1/4") waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 19mm (3/4") diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Freezer Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

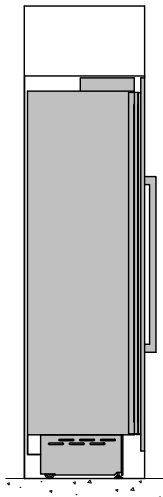

FRONT VIEW

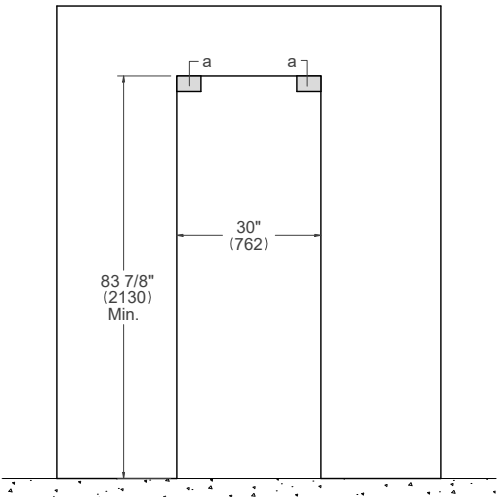

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

75cm (30") Freezer Column Panel Ready


Dimensions




FRZ755UBLPTT (left hinge)

FRZ755UBRPTT (right hinge)


SIDE VIEW

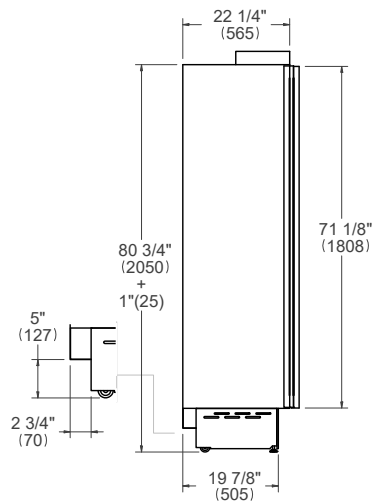


FRONT VIEW

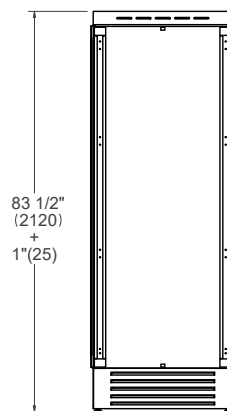


TOP VIEW

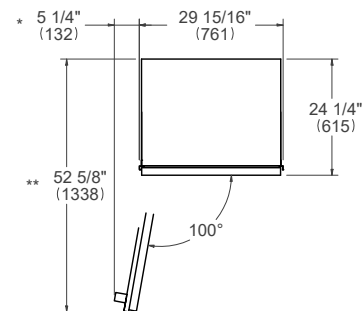


SIDE VIEW

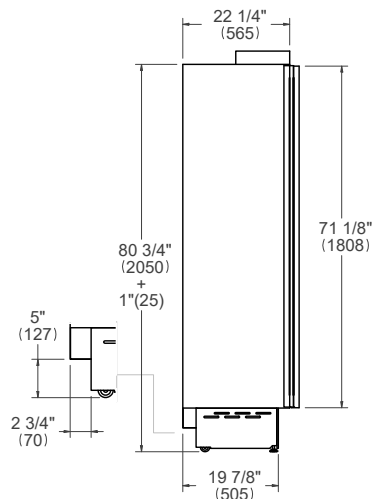

FRONT VIEW

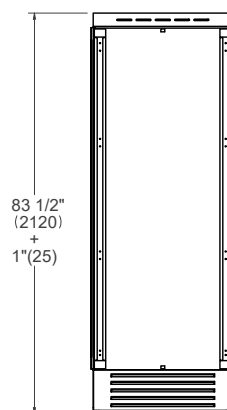

TOP VIEW

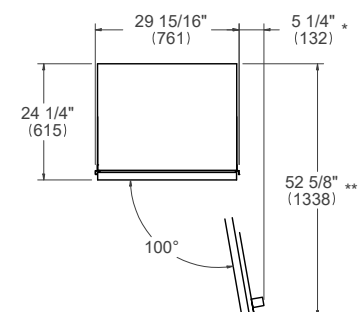

* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Freezer Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product. For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	570 kg (1257 lb)
-------------------------------	------------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 6,4mm (1/4") waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 19mm (3/4") diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

75cm (30") Freezer Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

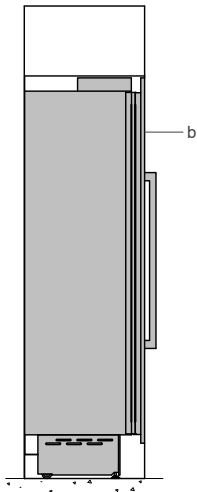

FRONT VIEW

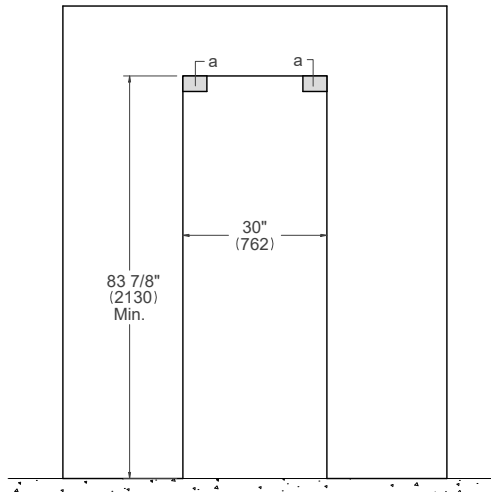

- (a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")
- (b) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

60cm (24") Freezer Column Panel Installed

Dimensions



FRZ605UBLXTT (left hinge)
FRZ605UBRXTT (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

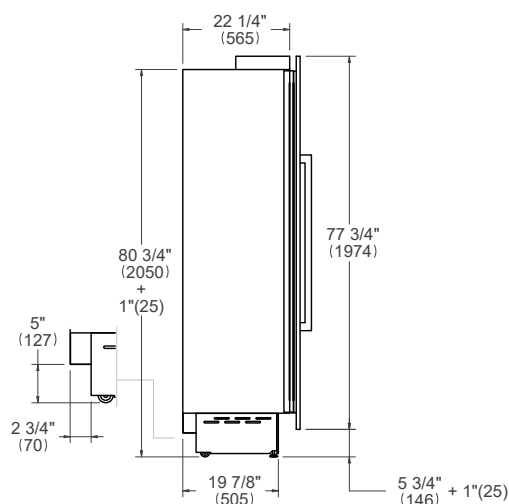


FRONT VIEW

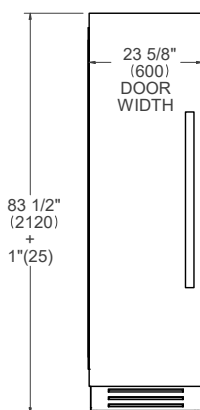


TOP VIEW




SIDE VIEW

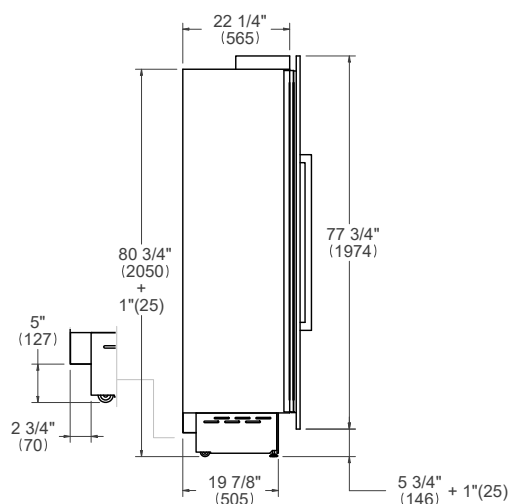

FRONT VIEW

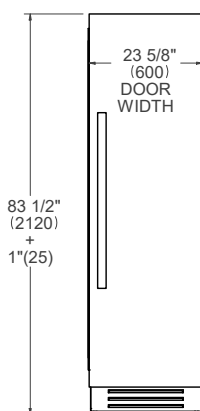

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Freezer Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product..

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)
-------------------------------	-----------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 6,4mm (1/4") waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 19mm (3/4") diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Freezer Column Panel Installed


Flush installation




TOP VIEW^b

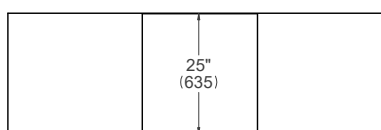

SIDE VIEW

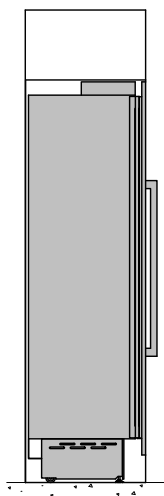

FRONT VIEW

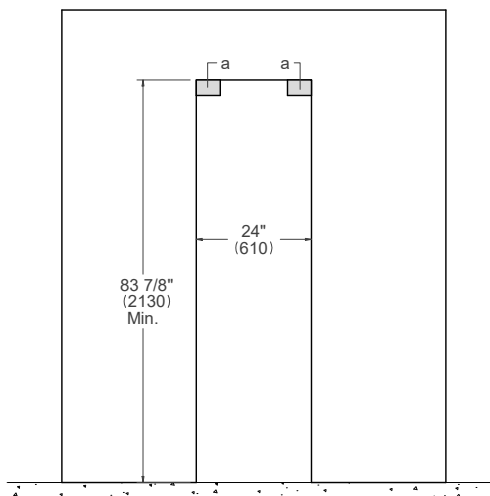

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

60cm (24") Freezer Column Panel Ready


Dimensions




FRZ605UBLPTT (left hinge)

FRZ605UBRPTT (right hinge)


SIDE VIEW

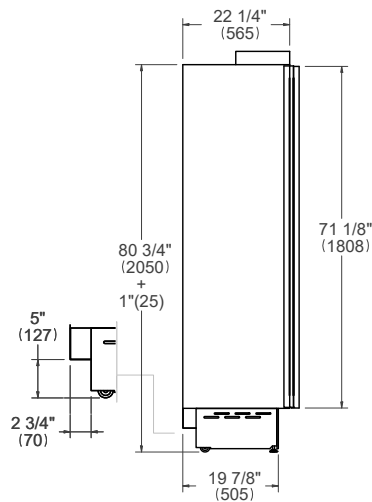


FRONT VIEW

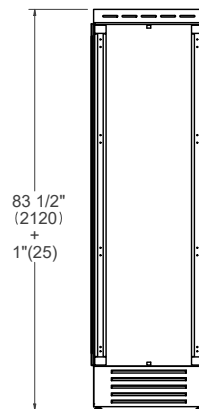


TOP VIEW




SIDE VIEW

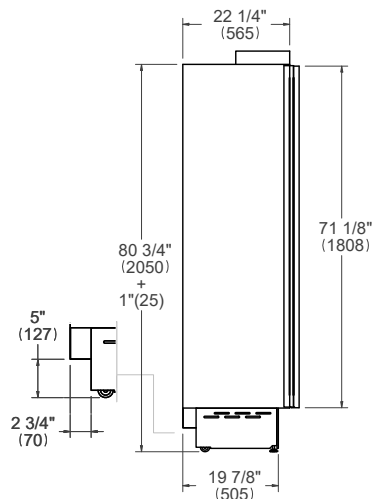

FRONT VIEW

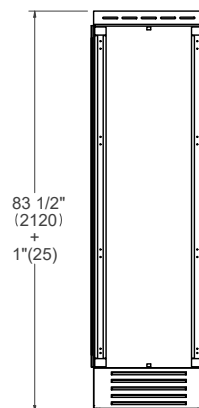

TOP VIEW



* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Freezer Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product. For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)
-------------------------------	-----------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 6,4mm (1/4") waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 19mm (3/4") diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Freezer Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

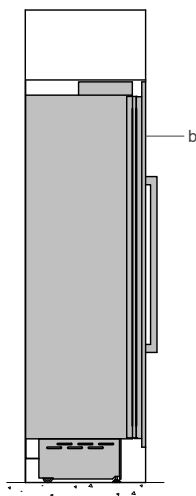

FRONT VIEW

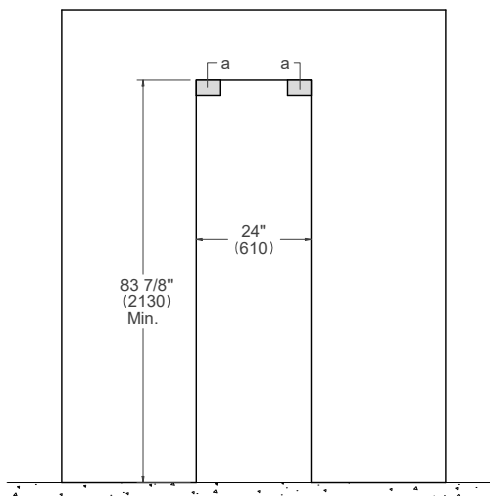

- (a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")
- (b) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

45cm (18") Freezer Column Panel Installed

Dimensions



FRZ455UBLXTT (left hinge)
FRZ455UBRXTT (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

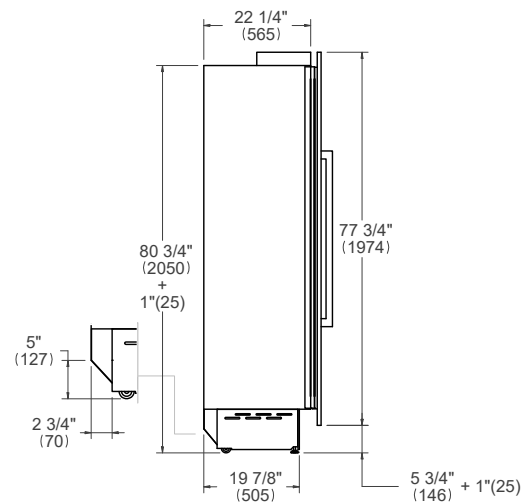


FRONT VIEW

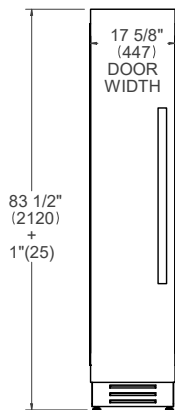


TOP VIEW




SIDE VIEW

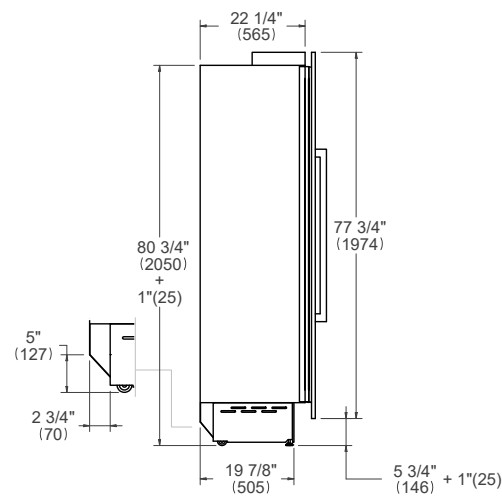

FRONT VIEW

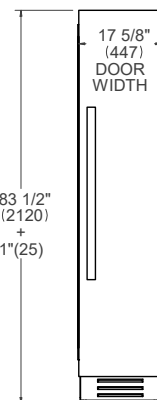

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

45cm (18") Freezer Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)
-------------------------------	-----------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 6,4mm (1/4") waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 19mm (3/4") diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

45cm (18") Freezer Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

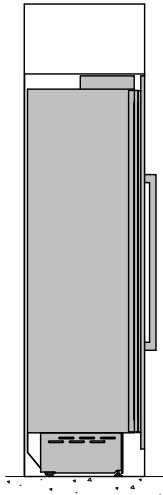

FRONT VIEW

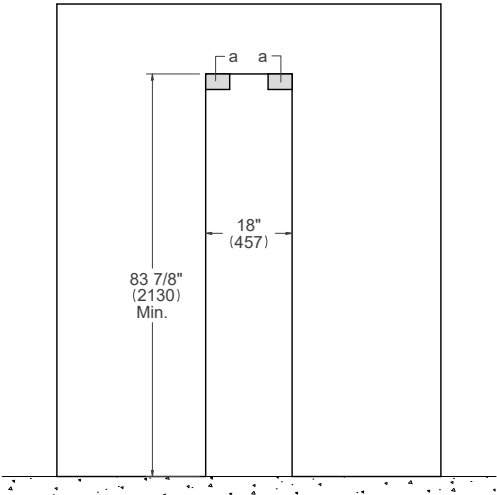

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


45cm (18") Freezer Column Panel Ready

Dimensions




FRZ455UBLPTT (left hinge)
FRZ455UBRPTT (right hinge)


SIDE VIEW

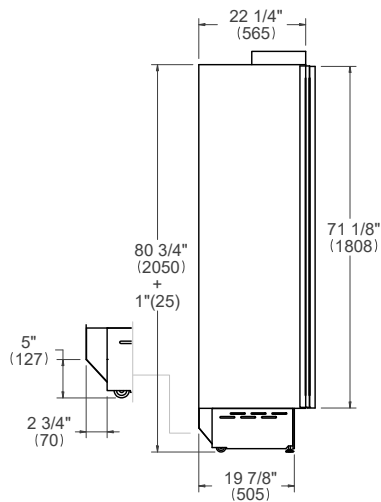


FRONT VIEW

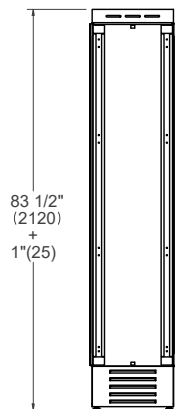


TOP VIEW




SIDE VIEW

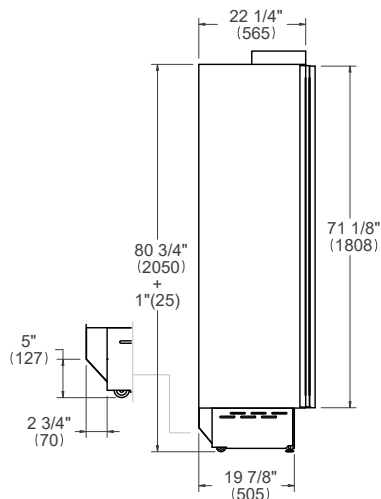

FRONT VIEW

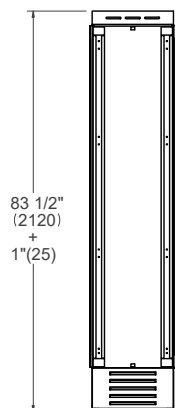

TOP VIEW



* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

45cm (18") Freezer Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)
-------------------------------	-----------------

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.

Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.


Placement within the opening may require additional cabinet depth.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 275 W 1,5 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 6,4mm (1/4") waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 19mm (3/4") diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.


Dimensions in parentheses are millimeters unless otherwise specified.

45cm (18") Freezer Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

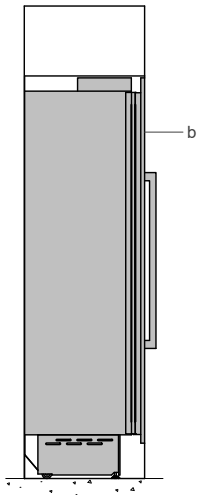

FRONT VIEW

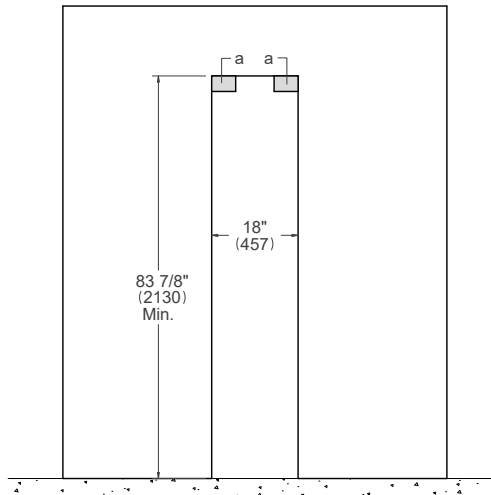

- (a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")
- (b) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual


Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

BUILT-IN WINE COLUMNS



60cm - 45cm
(24" - 18")
Panel Ready and
Panel Installed





60cm (24") Wine Column Panel Installed

Dimensions



WC605BLX2T (left hinge)

WC605BRX2T (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

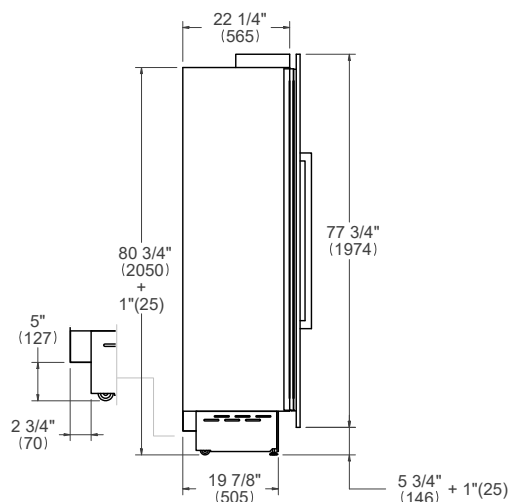


FRONT VIEW

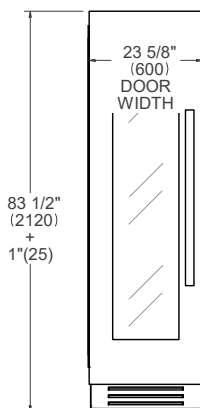


TOP VIEW




SIDE VIEW

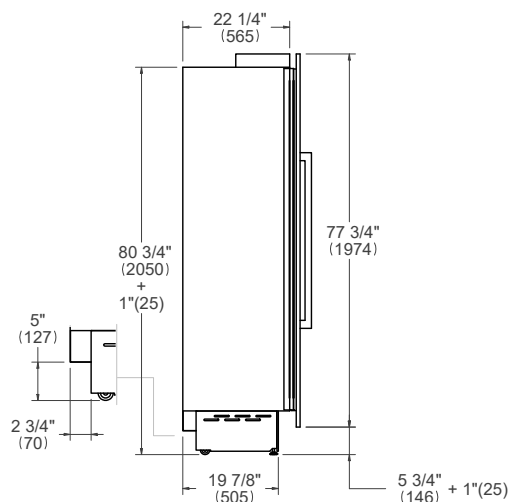

FRONT VIEW

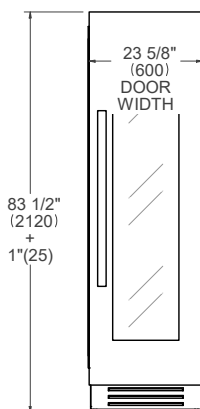

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Wine Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)
-------------------------------	-----------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Wine Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

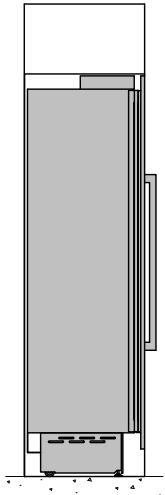

FRONT VIEW

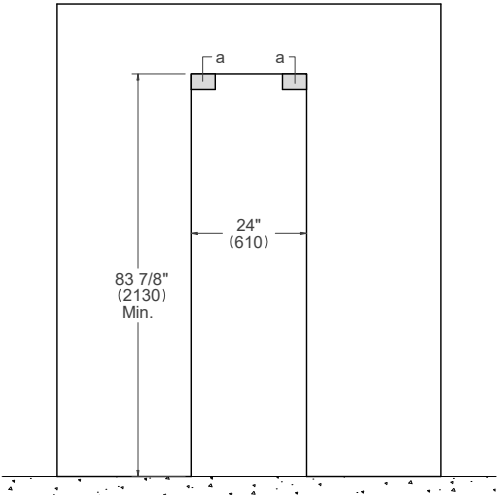

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


60cm (24") Wine Column Panel Ready

Dimensions




WC605BLP2T (left hinge)
WC605BRP2T (right hinge)


SIDE VIEW

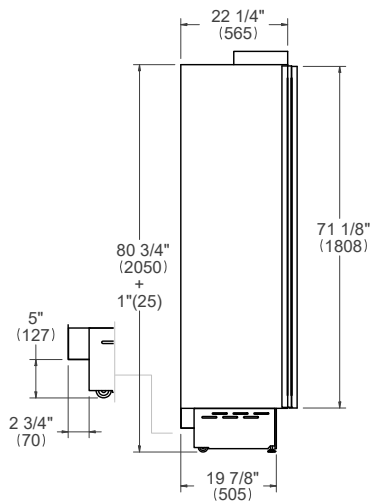


FRONT VIEW

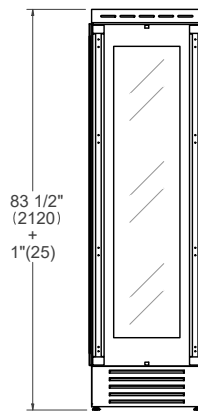


TOP VIEW




SIDE VIEW

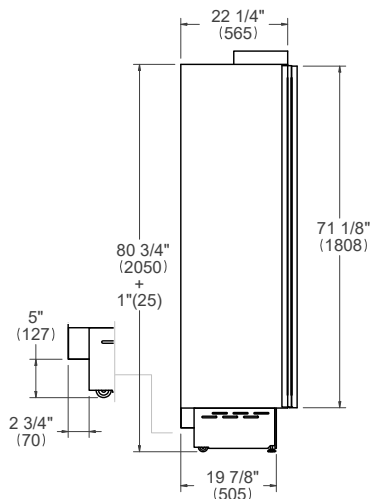

FRONT VIEW

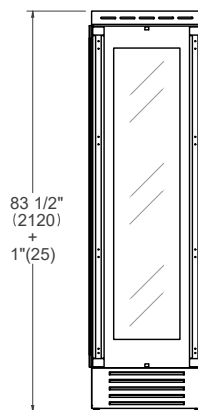

TOP VIEW



* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

For custom panel dimensions and window cutout see page 69.

60cm (24") Wine Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.
For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	450 kg (992 lb)
------------------------	-----------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly - grounded horizontally - mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

60cm (24") Wine Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

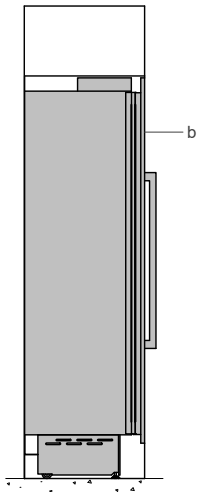

FRONT VIEW

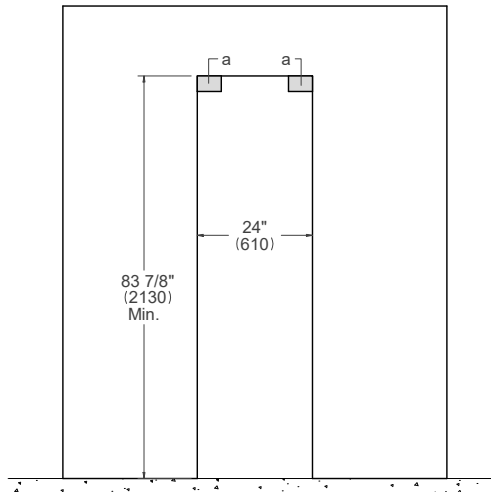

- (a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")
- (b) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

45cm (18") Wine Column Panel Installed

Dimensions



WC455BLX2T (left hinge)

WC455BRX2T (right hinge)


Handle choices

Professional Series: PROHKCOL


Master series: MASHKCOL

Heritage Series: HERHKCOL


SIDE VIEW

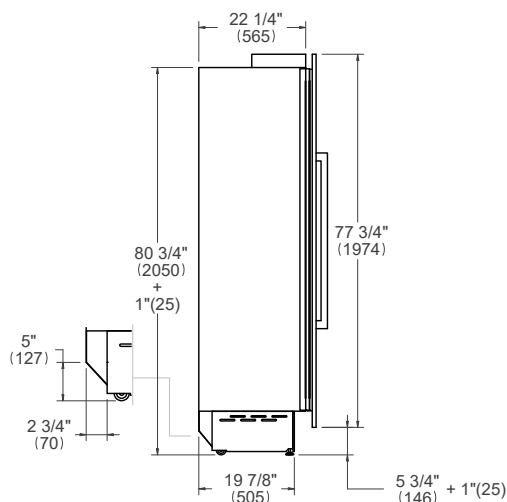


FRONT VIEW

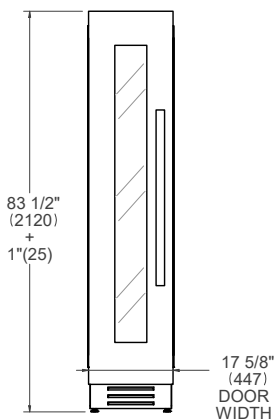


TOP VIEW




SIDE VIEW

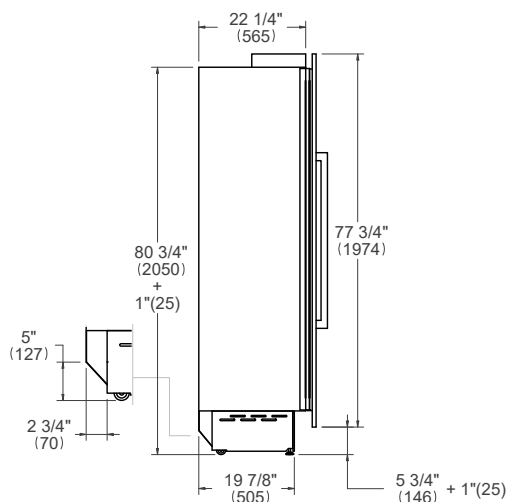

FRONT VIEW

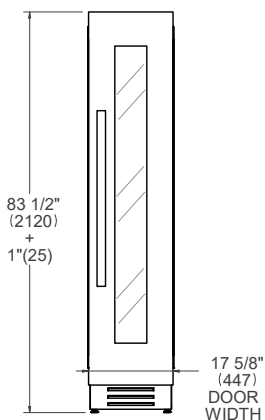

TOP VIEW



* Maximum Overall Handle Dimension
For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

45cm (18") Wine Column Panel Installed

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.
Finish the edges of the opening because they may be visible when the door is open.
For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT


Installation of the appliance must be performed in accordance with the provisions of applicable legislation.
Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.
The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)
------------------------	-----------------


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes.
A properly - grounded horizontally - mounted electrical receptacle should be installed.
Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.
Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.


Dimensions in parentheses are millimeters unless otherwise specified.

45cm (18") Wine Column Panel Installed


Flush installation




TOP VIEW^b



SIDE VIEW

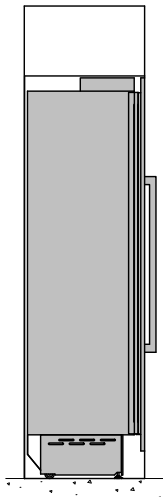

FRONT VIEW

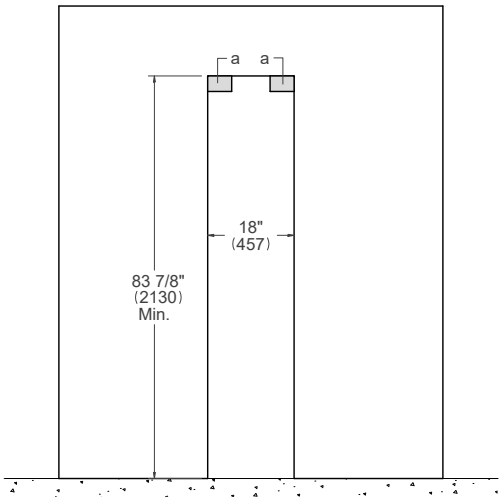

(a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.

45cm (18") Wine Column Panel Ready


Dimensions




WC455BLP2T (left hinge)

WC455BRP2T (right hinge)


SIDE VIEW

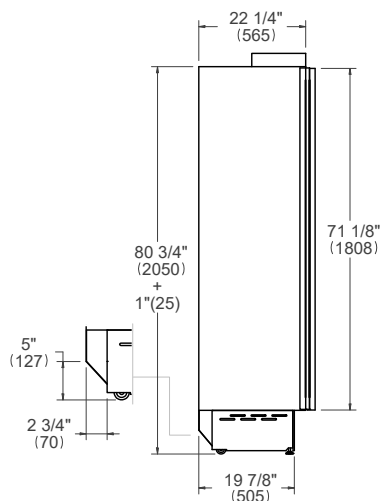


FRONT VIEW

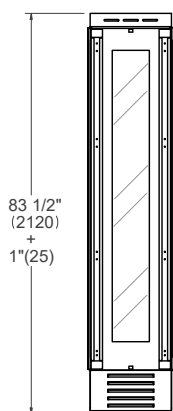


TOP VIEW




SIDE VIEW

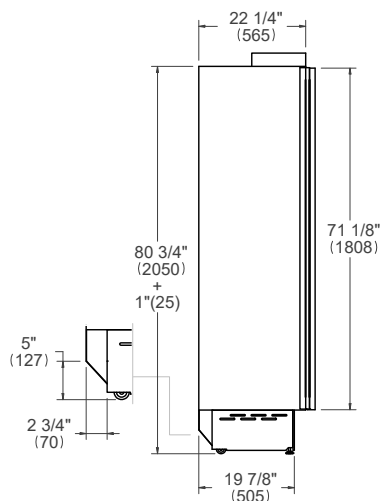

FRONT VIEW

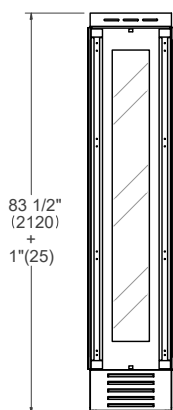

TOP VIEW



* Maximum Overall Handle Dimension

** Width of 19mm (3/4") Door Panel

For detailed handle dimensions see page 71

Dimensions in parentheses are millimeters unless otherwise specified.

For custom panel dimensions and window cutout see page 69.

45cm (18") Wine Column Panel Ready

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliance and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliance must be performed in accordance with the provisions of applicable legislation.

Be sure that support of this appliance is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of the appliance when in use.

Required floor support	315 kg (694 lb)
------------------------	-----------------

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

ELECTRICAL REQUIREMENT


The installation must comply with all applicable electrical codes.

A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate circuit breaker servicing only this appliance is recommended.

Electrical supply	220-240 V 50/60 Hz 130 W 0,7 Amp
Service	10 Amp dedicated circuit
Power Connection	2-pole 220V SCHUKO plug with 2m power cord


Dimensions in parentheses are millimeters unless otherwise specified.

45cm (18") Wine Column Panel Ready


Flush installation




TOP VIEW^b



SIDE VIEW

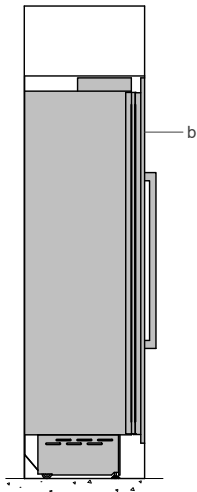

FRONT VIEW

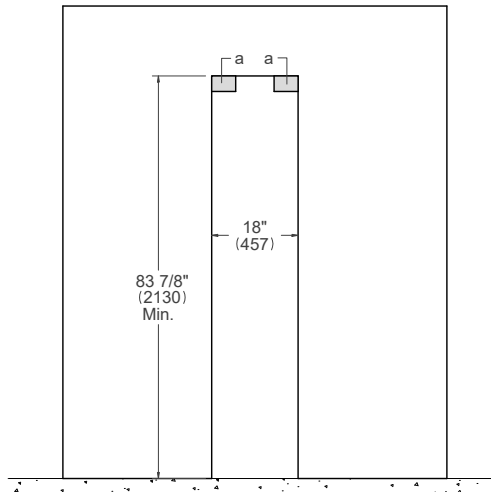

- (a) Area to be left clear for the anti-tipping brackets – 82x127mm (3"1/2x5")
- (b) Panel dimensions available on Built-in Food Preservation Design Guide or Installation Manual

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

MULTIPLE INSTALLATIONS





Multiple installations

Installation requirements



INSTALLATION

All Bertazzoni columns can be installed in a standard 635mm (25") depth cutout.

Finish the edges of the opening because they may be visible when the door is open.

For a built-in installation, to cover gaps between the appliances and the adjacent cabinets, special side profiles are factory-installed and covering frames are provided with the product.

For panel ready columns, do not exceed the maximum weight of 34 kg (75 pounds) for door panel. Panel can have thickness ranging between 19mm (3/4") and 28mm (1 1/8").

For instructions of product combinations please see the Multiple Installation Section (page 58).

CABINET REQUIREMENT

Installation of the appliances must be performed in accordance with the provisions of applicable legislation. Be sure that support of these appliances is perpendicular to the front facing of the wall or cabinet before you perform the installation.

The floor must be flat and must be capable of supporting the weight of all the appliances when in use. Please see any single product installation manual for required floor support.


ELECTRICAL REQUIREMENT

The installation must comply with all applicable electrical codes. A properly - grounded horizontally - mounted electrical receptacle should be installed.


Place the electrical supply flush with the back wall and within the shaded area shown in the illustrations.

Placement within the opening may require additional cabinet depth.

TOP VIEW



FRONT VIEW



A separate 10 Amp circuit breaker servicing only these appliances is recommended.

PLUMBING REQUIREMENTS

Bertazzoni Freezer Columns are provided with a water filter assembly which must be mounted outside the unit.

The appliance must be connected only to a potable water supply system.

To connect to water supply system (for appliances equipped with ice maker) a 6,4mm (1/4") waterline with accessible shut-off valve must be supplied.

The solenoid connection on the appliance is 19mm (3/4") diameter but is metric threaded (NPT).

The system pressure must be between from 8 PSI to 75 PSI (between 0.5 bar and 5 bar). Different pressures can cause malfunctions or leaks in the water system.

For information on how to purchase the water filter, please see Use and Maintenance Manual.

For detailed installation specifications consult the multiple installation requirements page or each single product installation manual.

Dimensions in parentheses are millimeters unless otherwise specified.


105cm (42") Double Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD605UBRXTT
FRZ455UBLXTT
LRD605UBLXTT
FRZ455UBRXTT
LRD605UBRPTT
FRZ455UBLPTT
LRD605UBLPTT
FRZ455UBRPTT




LRD605UBRXTT
WC455BLX2T
LRD605UBLXTT
WC455BRX2T
LRD605UBRPTT
WC455BLP2T
LRD605UBLPTT
WC455BRP2T




FRZ605UBRXTT
WC455BLX2T
FRZ605UBLXTT
WC455BRX2T
FRZ605UBRPTT
WC455BLP2T
FRZ605UBLPTT
WC455BRP2T



TOP VIEW ^b



FRONT VIEW

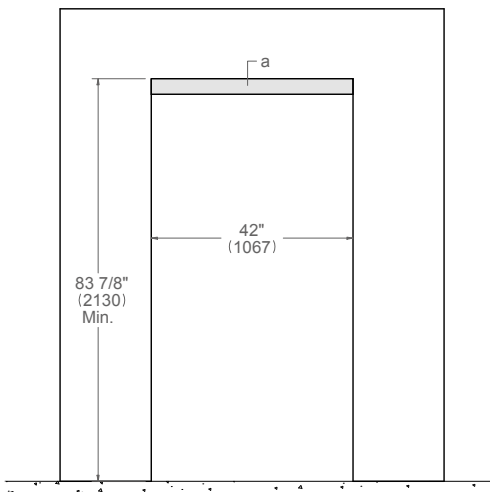

- (a) Spacers - Included with appliance
- (b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

c: Optional 105cm (42 inch) bridge toe kick accessory is available.
For details see page 72


120cm (48") Double Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD755UBRXTT
FRZ455UBLXTT
LRD755UBLXTT
FRZ455UBRXTT
LRD755UBRPTT
FRZ455UBLPTT
LRD755UBLPTT
FRZ455UBRPTT




LRD755UBRXTT
WC455BLX2T
LRD755UBLXTT
WC455BRX2T
LRD755UBRPTT
WC455BLP2T
LRD755UBLPTT
WC455BRP2T




LRD605UBRXTT
FRZ605UBLXTT
LRD605UBLXTT
FRZ605UBRXTT
LRD605UBRPTT
FRZ605UBLPTT
LRD605UBLPTT
FRZ605UBRPTT



LRD605UBRXTT
WC605BLX2T
LRD605UBLXTT
WC605BRX2T
LRD605UBRPTT
WC605BLP2T
LRD605UBLPTT
WC605BRP2T




FRZ605UBLXTT
WC605BRX2T
FRZ605UBRXTT
WC605BLX2T
FRZ605UBLPTT
WC605BRP2T
FRZ605UBRPTT
WC605BLP2T



TOP VIEW ^b



FRONT VIEW

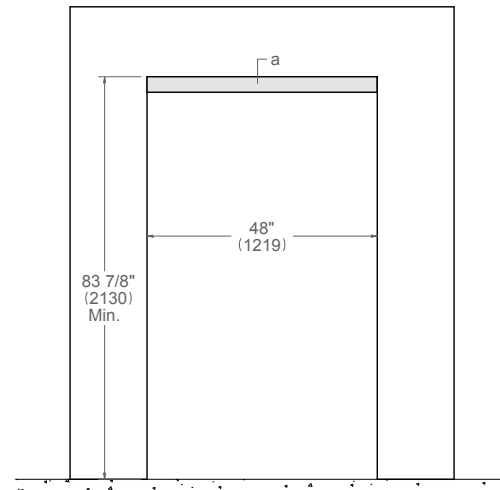

- (a) Spacers - Included with appliance
- (b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.

c: Optional 120cm (48 inch) bridge toe kick accessory is available.
For details see page 72


135cm (54") Double Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD755UBRXTT
FRZ605UBLXTT
LRD755UBLXTT
FRZ605UBRXTT
LRD755UBRPTT
FRZ605UBLPTT
LRD755UBLPTT
FRZ605UBRPTT




LRD755UBRXTT
WC605BLX2T
LRD755UBLXTT
WC605BRX2T
LRD755UBRPTT
WC605BLP2T
LRD755UBLPTT
WC605BRP2T




LRD905UBRXTT
FRZ455UBLXTT
LRD905UBLXTT
FRZ455UBRXTT
LRD905UBRPTT
FRZ455UBLPTT
LRD905UBLPTT
FRZ455UBRPTT



LRD905UBRXTT
WC455BLX2T
LRD905UBLXTT
WC455BRX2T
LRD905UBRPTT
WC455BLP2T
LRD905UBLPTT
WC455BRP2T




FRZ755UBRXTT
WC605BLX2T
FRZ755UBLXTT
WC605BRX2T
FRZ755UBRPTT
WC605BLP2T
FRZ755UBLPTT
WC605BRP2T



TOP VIEW ^b



FRONT VIEW

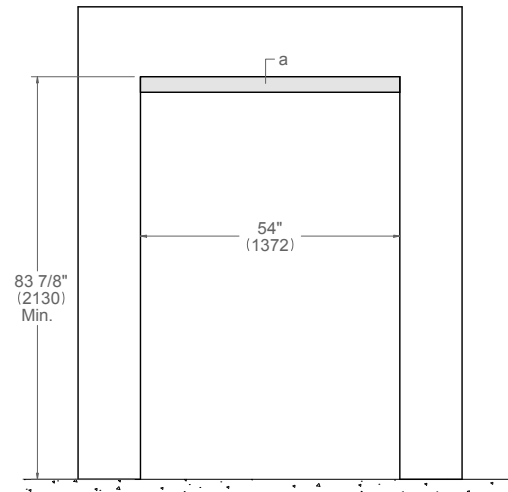

- (a) Spacers - Included with appliance
(b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.

b: depth includes kitchen cabinet front panel.


150cm (60") Double Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD755UBRXTT
FRZ755UBLXTT
LRD755UBLXTT
FRZ755UBRXTT
LRD755UBRPTT
FRZ755UBLPTT
LRD755UBLPTT
FRZ755UBRPTT




LRD905UBRXTT
WC605BLX2T
LRD905UBLXTT
WC605BRX2T
LRD905UBRPTT
WC605BLP2T
LRD905UBLPTT
WC605BRP2T




LRD905UBRXTT
FRZ605UBLXTT
LRD905UBLXTT
FRZ605UBRXTT
LRD905UBRPTT
FRZ605UBLPTT
LRD905UBLPTT
FRZ605UBRPTT



TOP VIEW ^b



FRONT VIEW

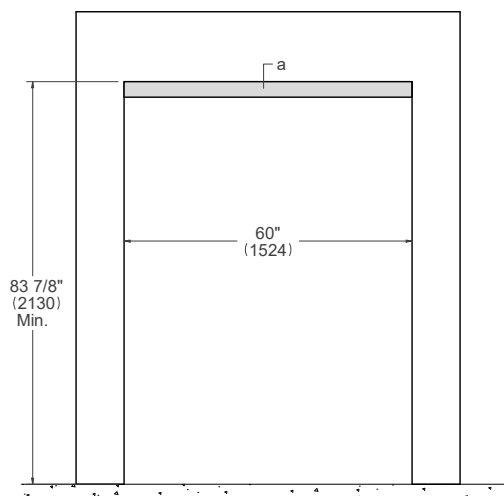

- (a) Spacers - Included with appliance
(b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


150cm (60") Triple Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD605UBRXTT
FRZ455UBLXTT
WC455BRX2T




LRD605UBRXTT
FRZ455UBRXTT
WC455BLX2T




LRD605UBRXTT
FRZ455UBRXTT
WC455BLX2T




LRD605UBLXTT
FRZ455UBRXTT
WC455BLX2T



TOP VIEW ^b



FRONT VIEW

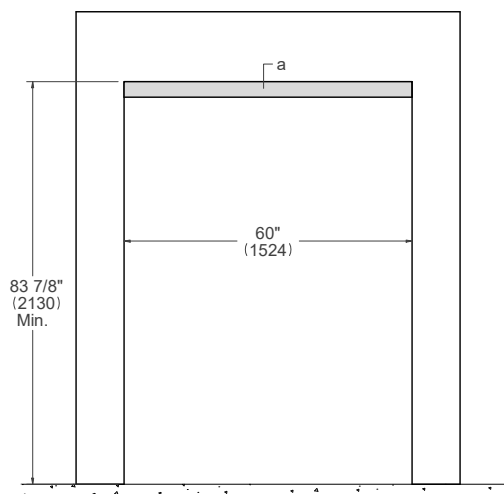

- (a) Spacers - Included with appliance
(b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


165cm (66") Triple Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD755UBRXTT
FRZ455UBLXTT
WC455BRX2T
LRD755UBRPTT
FRZ455UBLPTT
WC455BRP2T




LRD755UBLXTT
FRZ455UBRXTT
WC455BLX2T
LRD755UBLPTT
FRZ455UBRPTT
WC455BLP2T



LRD755UBRXTT
FRZ455UBRXTT
WC455BLX2T
LRD755UBRPTT
FRZ455UBRPTT
WC455BLP2T




LRD755UBLXTT
FRZ455UBRXTT
WC455BLX2T
LRD755UBLPTT
FRZ455UBRPTT
WC455BLP2T



TOP VIEW ^b



FRONT VIEW

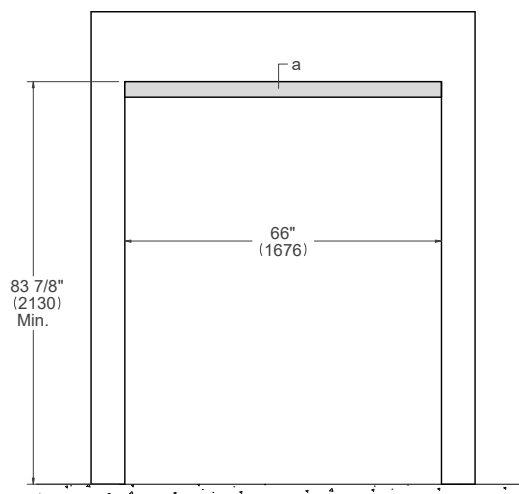

- (a) Spacers - Included with appliance
(b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


180cm (72") Triple Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD605UBLXTT
FRZ605UBRXTT
WC605BRX2T




LRD605UBRXTT
FRZ605UBLXTT
WC605BLX2T



LRD605UBRXTT
FRZ605UBRXTT
WC605BLX2T




LRD605UBRXTT
FRZ605UBLXTT
WC605BLX2T



TOP VIEW ^b



FRONT VIEW

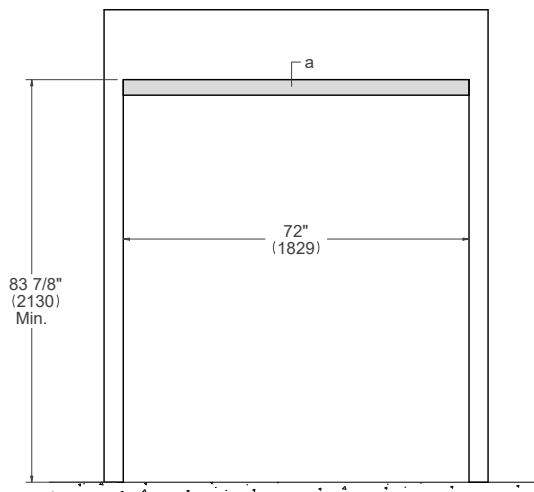

- (a) Spacers - Included with appliance
(b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.
b: depth includes kitchen cabinet front panel.


225 cm (90") Triple Configurations

Flush installation




POSSIBLE COMBINATIONS ^c


LRD905UBLXTT
FRZ755UBRXTT
WC605BRX2T
LRD905UBLPTT
FRZ755UBRPTT
WC605BRP2T




LRD905UBLXTT
FRZ755UBRXTT
WC605BLX2T
LRD905UBLPTT
FRZ755UBRPTT
WC605BLP2T



LRD905UBRXTT
FRZ755UBRXTT
WC605BLX2T
LRD905UBRPTT
FRZ755UBRPTT
WC605BLP2T




LRD905UBLXTT
FRZ755UBRXTT
WC605BLX2T
LRD905UBLPTT
FRZ755UBRPTT
WC605BLP2T



TOP VIEW ^b



FRONT VIEW

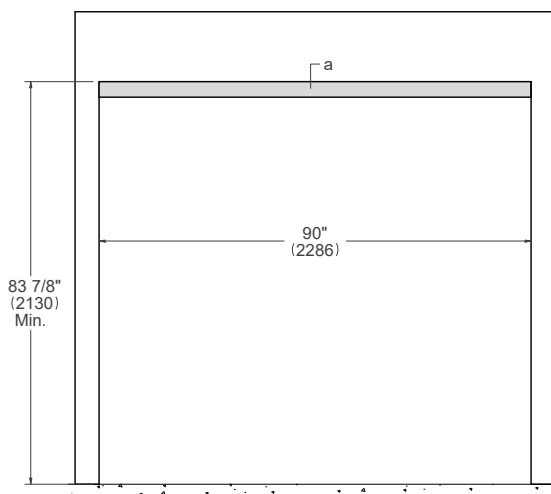

- (a) Spacers - Included with appliance
- (b) All Freezer and Wine Columns are supplied with a vertical connector trim for multiple columns installations.
No addition accessories are needed

Dimensions in parentheses are millimeters unless otherwise specified.


b: depth includes kitchen cabinet front panel.

c: Optional 105cm (42 inch) bridge toe kick accessory is available.
For details see page 72


Custom Door Panel




REAR PANEL DRILLING

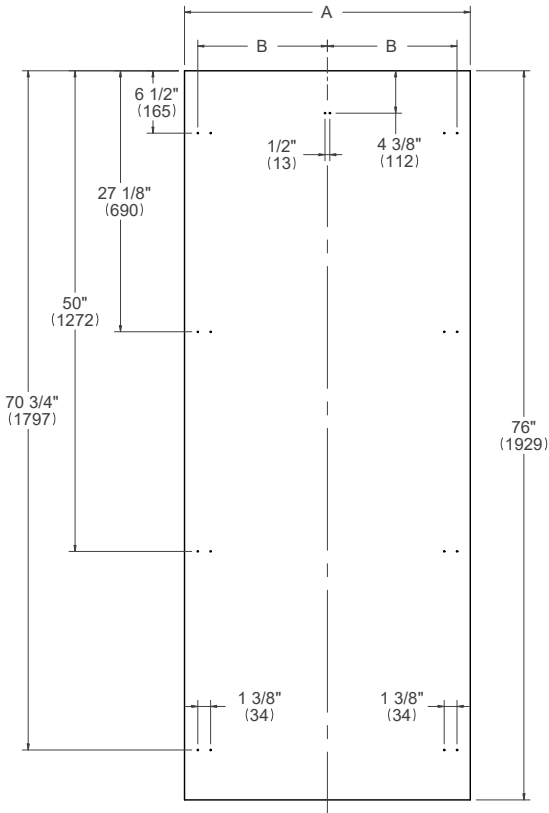

WINE COLUMN
DOOR WINDOW
DIMENSIONS

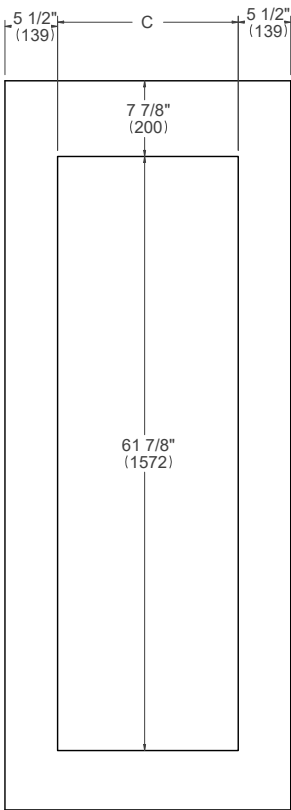

CUSTOM HANDLES
MOUNTING AREA

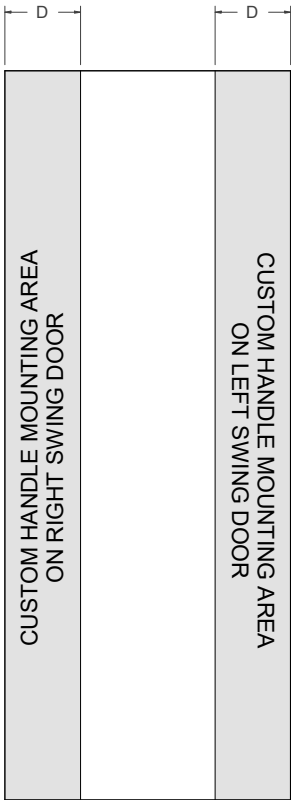


	36"	30"	24"	18"
A	35 3/4" (908)	29 3/4" (756)	23 3/4" (604)	17 3/4" (451)
B	16 1/2" (418)	13 1/2" (343)	10 7/8" (275)	7 7/8" (200)
C	–	–	12 7/8" (327)	6 7/8" (177)
D	7 1/8" (182)	6" (152)	4 3/4" (121)	3 5/8" (92)

Dimensions in parentheses are millimeters unless otherwise specified.


Recommended Installations



RECOMMENDED INSTALLATIONS

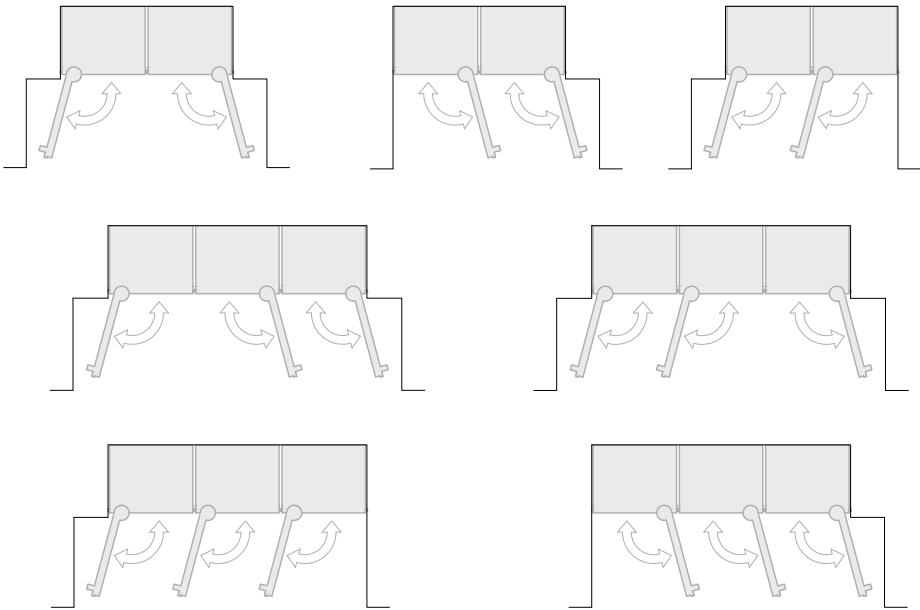


NOT RECOMMENDED INSTALLATIONS

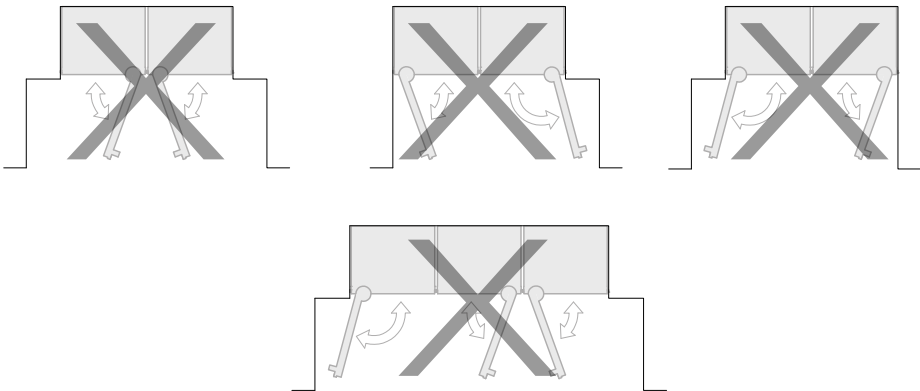


Refrigeration Handles




**PROFESSIONAL SERIES
PROHKCOL**




**MASTER SERIES
MASHKCOL**




**HERITAGE SERIES
HERHKCOL**



**BERTAZZONI HANDLES
DRILLING ON RIGHT SWING DOOR**

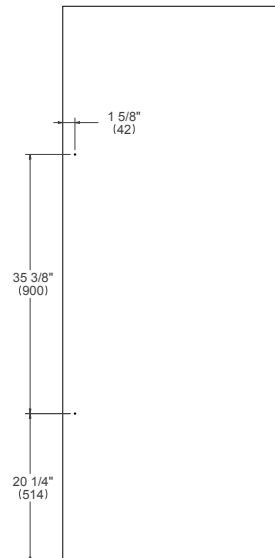

**BERTAZZONI HANDLES
DRILLING ON LEFT SWING DOOR**

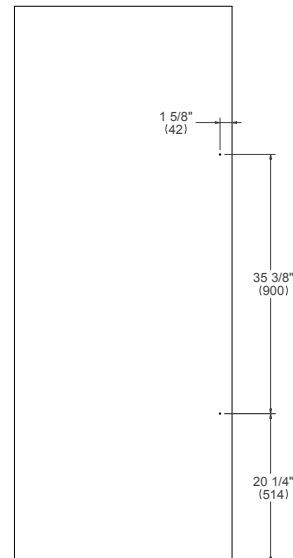





HANDLE INSTALLATION ON CUSTOM PANELS

In case a custom panel is to be mounted on any of the models listed below with Bertazzoni handles, it will be necessary to install M5 x 0.8 mm brass tapping inserts in order to secure the handle properly on the custom panel. Recommended drill bit size to drill the pilot hole is 9,5mm (3/8").

Do not use a power tool to mount the inserts. Installation of the inserts with improperly calibrated power tools risk damaging the panels.

Dimensions in parentheses are millimeters unless otherwise specified.

Toekick Panel

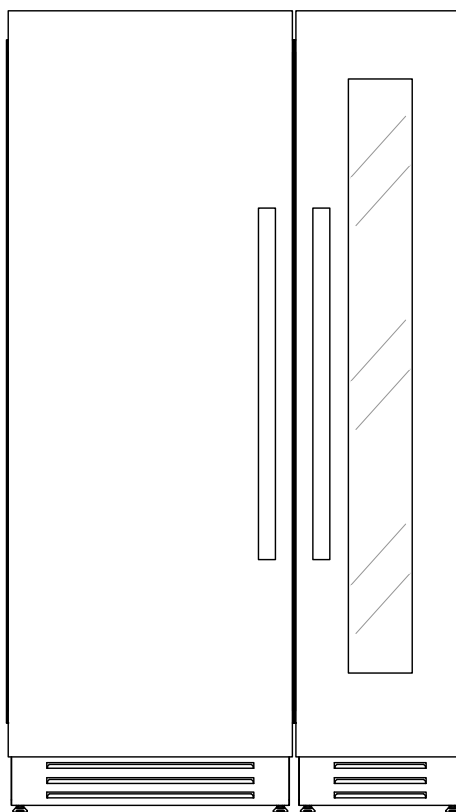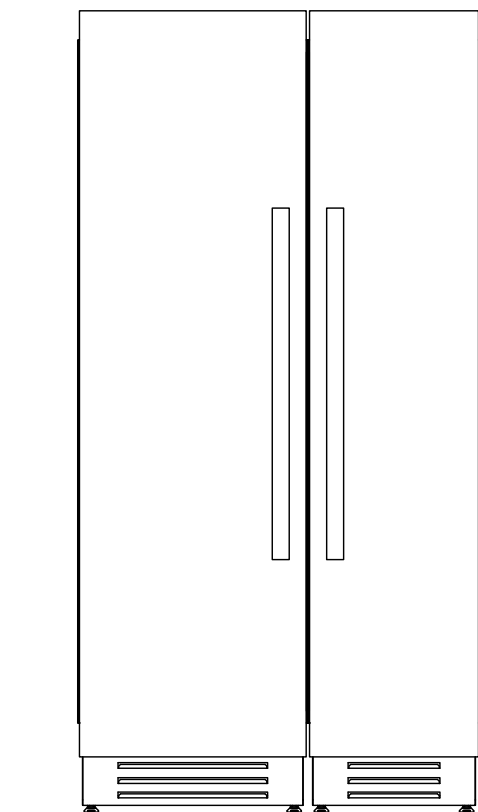

Part number 901560

Part number 901561

Installation of multiple column units with a continuous cabinet toe kick are possible. Details are provided in the Bertazzoni Columns installation manual

BERTAZZONI.COM



TO COOK BEAUTIFULLY